

nifty HR12

12.20m (40ft) Working height

6.10m (20ft) Working outreach

Telescopic Upper Boom

Greater accuracy when positioning platform

1.50m Chassis

Improved narrow aisle access

Bi-Energy Available

Optimising Utilisation

Weight Under 3.2 Tonnes


Low cost transportation

Fully Proportional Hydraulic Controls

Simple, reliable & easy to maintain

SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled Tyres
- Manual Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Dual Harness Points
- CE Mark

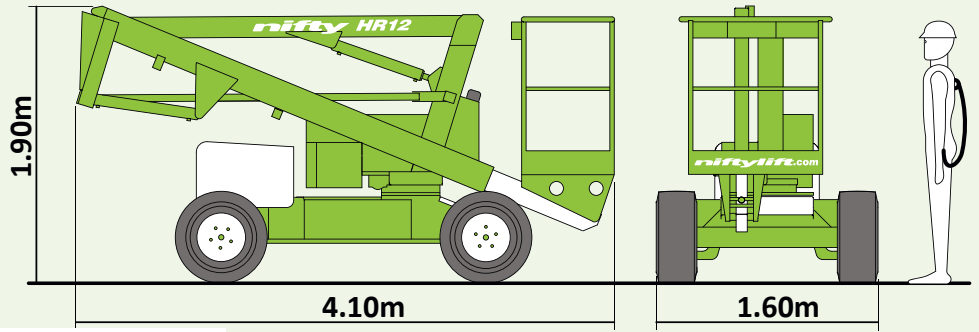

SPECIFICATIONS

Working Height	12.20m	40ft
Platform Height	10.20m	33ft 6in
Working Outreach	6.10m	20ft
Slew	360°	
Width	1.50m	4ft 11in
Height	1.90m	6ft 3in
Length	4.10m	13ft 5in
Minimum Weight	3,100kg*	6,830lbs*
Turning Radius - Outside	4.20m	13ft 9in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 7in x 2ft 2in
Drive Speed	2.1mph	3.4 kph
Control System	Fully Proportional Hydraulic	
Power Options	Diesel Only Bi-Energy (Engine & Battery)	

* Weights may vary according to specification, please confirm before ordering.

