
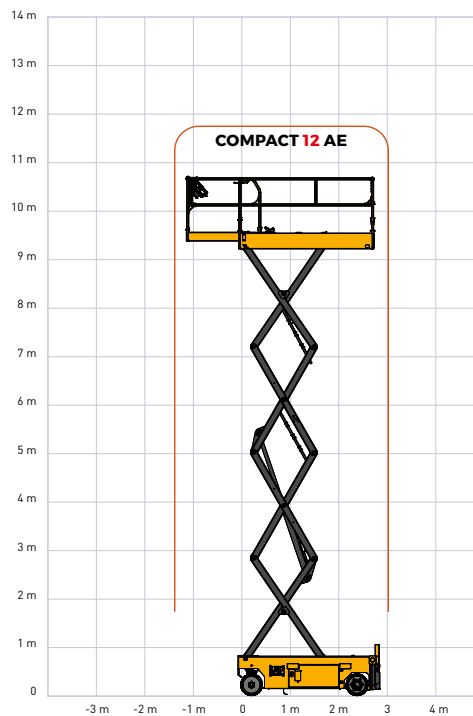
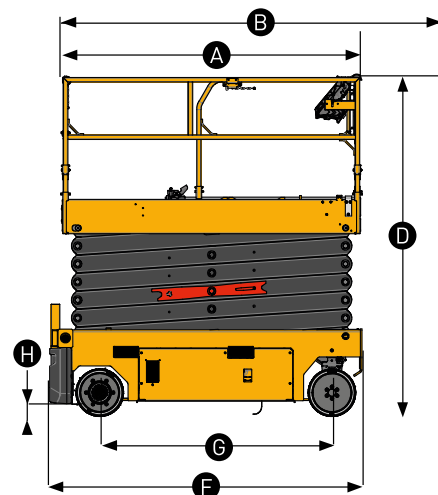


ELECTRIC SCISSOR LIFTS

TECHNICAL DATA

	COMPACT 12 AE
Working height	11.75 m
Platform height	9.75 m
Max. drive working height	9.75 m
Lift capacity - inside	320 kg (3 pers.)
Lift capacity - outside	320 kg (1 pers.)
Lift capacity on the extension deck	120 kg
A Platform length - outside	2.4 m
B Platform length - extended	3.32 m
Length - extension	0.92 m
C Platform width - outside	1.17 m
D Height - stowed	2.47 m
Guardrails lowered	1.77 m
E Overall width	1.20 m
F Length	2.5 m
G Wheelbase	1.86 m
H Ground clearance - center	12.5 cm
Ground clearance - deployed potholes	2 cm
Drive speed	0.7 / 1.5 / 4.2 km/h
Gradeability	25 %
Tilt (lonitudinal / lateral)	3.5° / 1.5°
Turning radius - outside	1.83 m
Non-marking tyres	15 x 5
Batteries	24 V - 225 Ah (C20)
Hydraulic system capacity	14 l
Weight	2 940 kg

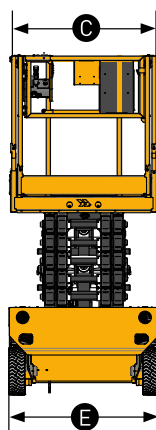

STANDARD EQUIPMENT

- > Haulotte Activ'Energy Management: Smart CAN charger
- > 27A multivoltage charger
- > Battery access with swing out tray
- > Battery level indicator
- > Haulotte Activ'Screen (battery charge information, hourmeter, service alerts & failures in code or in text...)
- > Lateral & longitudinal forklift pockets
- > Foldable guardrails
- > Front platform extension
- > AC motors
- > Mobile upper control box
- > 2 drive speeds selector
- > Manual emergency descent
- > Mobile pothole guards
- > MyHaulotte multi-services portal access
- > 2 front steering wheels, 2 rear drive wheels
- > Solid non marking tires
- > Motion alarm
- > Electric brake release system
- > Drop bar entry