


SJIII 3226 ELECTRIC SCISSOR LIFT

Dimensions	
A Work Height	32' (9.75 m)
B Raised Platform Height	26' (7.92 m)
C Lowered Platform Height	45" (1.14 m)
D Overall Width	32" (0.81 m)
E Overall Length	91.5" (2.32 m)
F Stowed Height (Rails Up)	84.7" (2.15 m)
G Stowed Height (Rails Down)	70.6" (1.79 m)
H Platform Width (Inside Dimension)	28" (0.71 m)
I Platform Length (Inside Dimension)	84" (2.13 m)
Specifications	
Extension Deck (Roll Out)	3' (0.91 m)
Ground Clearance (Stowed)	3.5" (8.89 cm)
Ground Clearance (Raised)	0.75" (1.90 cm)
Wheelbase	69" (1.75 m)
Weight	4,135 lbs (1,876 kg)
Gradeability	30%
Turning Radius (Inside)	50" (1.27 m)
Turning Radius (Outside)	108" (2.74 m)
Lift Time (With Rated Load)	56 sec
Lower time (With Rated Load)	42 sec
Drive Speed (Stowed)	2.4 mph (3.9 km/h)
Drive Speed (Raised)	0.7 mph (1.1 km/h)
Maximum Drive Height	Full Height
Capacity (Overall)	500 lbs (227 kg)
Distributed Capacity (Main Platform)	250 lbs (113 kg)
Distributed Capacity (Extension Deck)	250 lbs (113 kg)
Local Floor Load (With Rated Load)	130 psi (897 kPa)
Overall Floor Load (With Rated Load)	235 psf (12 kPa)
Maximum # of Persons	2
Wind Rating	28 mph (12.5 m/s)
Tire Type	Solid, N/M
Tire Size	16 x 5 x 12

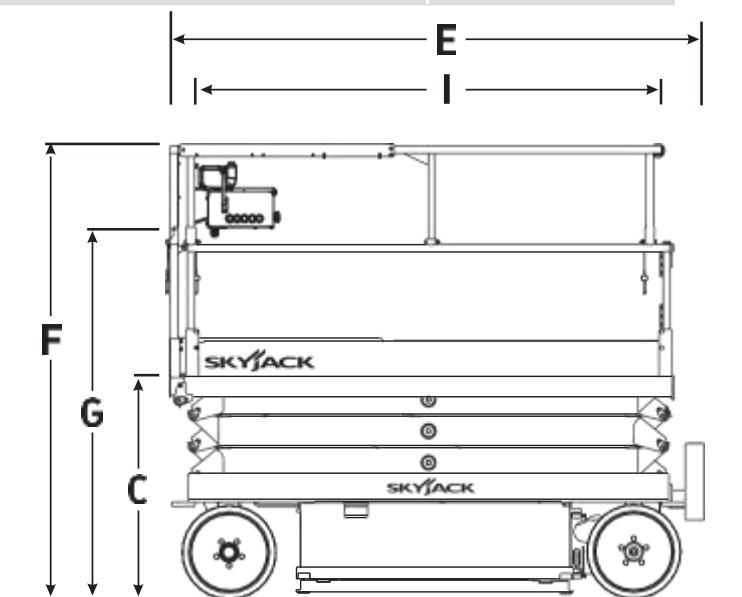

STANDARD FEATURES

- DC motor controller
- Driveable at full height
- Variable speed, rear two wheel hydraulic drive
- Dual holding brakes
- Proportional controls for drive & lift functions
- 24V DC power source
- Low voltage battery protect
- Solid rubber, non-marking tyres
- Pothole protection system
- 110V AC outlet on platform with GFI
- Tilt alarm with drive & lift cut
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Hinged railing system
- Forklift pockets and tie down/lift lugs
- Relay based control system
- SKYCODED™ color coded and numbered wiringsystem
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)

